

STM32 – 7 product series

Common core peripherals and architecture:

Communication peripherals: USART, SPI, I ² C
Multiple general-purpose timers
Integrated reset and brown-out warning
Multiple DMA
2x watchdogs
Real-time clock
Integrated regulator PLL and clock circuit
External memory interface (FSMC)
Up to 3x 12-bit DAC
Up to 4x 12-bit ADC (Up to 5 MSPS)
Main oscillator and 32 kHz oscillator
Low-speed and high-speed internal RC oscillators
-40 to +85 °C and up to 105 °C operating temperature range
Low voltage 2.0 to 3.6 V or 1.65/1.7 to 3.6 V (depending on series)
Temperature sensor

+

STM32 F4 series - High performance with DSP (STM32F405/415/407/417)

168 MHz Cortex-M4 with DSP and FPU	Up to 192-Kbyte SRAM	Up to 1-Mbyte Flash	2x USB 2.0 OTG FS/HS	3-phase MC timer	2x CAN 2.0B	SDIO 2x I ² S audio Camera IF	Ethernet IEEE 1588	Crypto/ hash processor and RNG
------------------------------------	----------------------	---------------------	----------------------	------------------	-------------	--	--------------------	--------------------------------



STM32 F3 series - Mixed-signal with DSP (STM32F302/303/313/372/373/383)

72 MHz Cortex-M4 with DSP and FPU	Up to 48-Kbyte SRAM & CCM-SRAM	Up to 256-Kbyte Flash	USB 2.0 FS	3-phase MC timer (144 MHz)	CAN 2.0B	Up to 7x comparator	3x 16-bit $\Sigma\Delta$ ADC	4x PGA
-----------------------------------	--------------------------------	-----------------------	------------	----------------------------	----------	---------------------	------------------------------	--------



STM32 F2 series - High performance (STM32F205/215/207/217)

120 MHz Cortex-M3 CPU	Up to 128-Kbyte SRAM	Up to 1-Mbyte Flash	2x USB 2.0 OTG FS/HS	3-phase MC timer	2x CAN 2.0B	SDIO 2x I ² S audio Camera IF	Ethernet IEEE 1588	Crypto/ hash processor and RNG
-----------------------	----------------------	---------------------	----------------------	------------------	-------------	--	--------------------	--------------------------------



STM32 F1 series - Mainstream - 5 product lines (STM32F100/101/102/103 and 105/107)

Up to 72 MHz Cortex-M3 CPU	Up to 96-Kbyte SRAM	Up to 1-Mbyte Flash	USB 2.0 OTG FS	3-phase MC timer	Up to 2x CAN 2.0B	SDIO 2x I ² S audio	Ethernet IEEE 1588
----------------------------	---------------------	---------------------	----------------	------------------	-------------------	--------------------------------	--------------------



STM32 F0 series – Entry level (STM32F050/051)

48 MHz Cortex-M0 CPU	Up to 12-Kbyte SRAM	Up to 128-Kbyte Flash	3-phase MC timer	Comparator	CEC
----------------------	---------------------	-----------------------	------------------	------------	-----



Start from 20 pin

STM32 L1 series - Ultra-low-power (STM32L151/152/162)

32 MHz Cortex-M3 CPU	Up to 48-Kbyte SRAM	Up to 384-Kbyte Flash	USB FS device	Up to 12-Kbyte EEPROM	LCD 8x40 4x44	Comparator	BOR MSI VScal	AES 128-bit
----------------------	---------------------	-----------------------	---------------	-----------------------	---------------	------------	---------------	-------------




STM32 W series - Wireless (STM32W108)


24 MHz Cortex-M3 CPU	Up to 16-Kbyte SRAM	Up to 256-Kbyte Flash	2.4 GHz IEEE 802.15.4 Transceiver	Lower MAC Digital baseband	AES 128-bit
----------------------	---------------------	-----------------------	-----------------------------------	----------------------------	-------------



STM32 portfolio overview

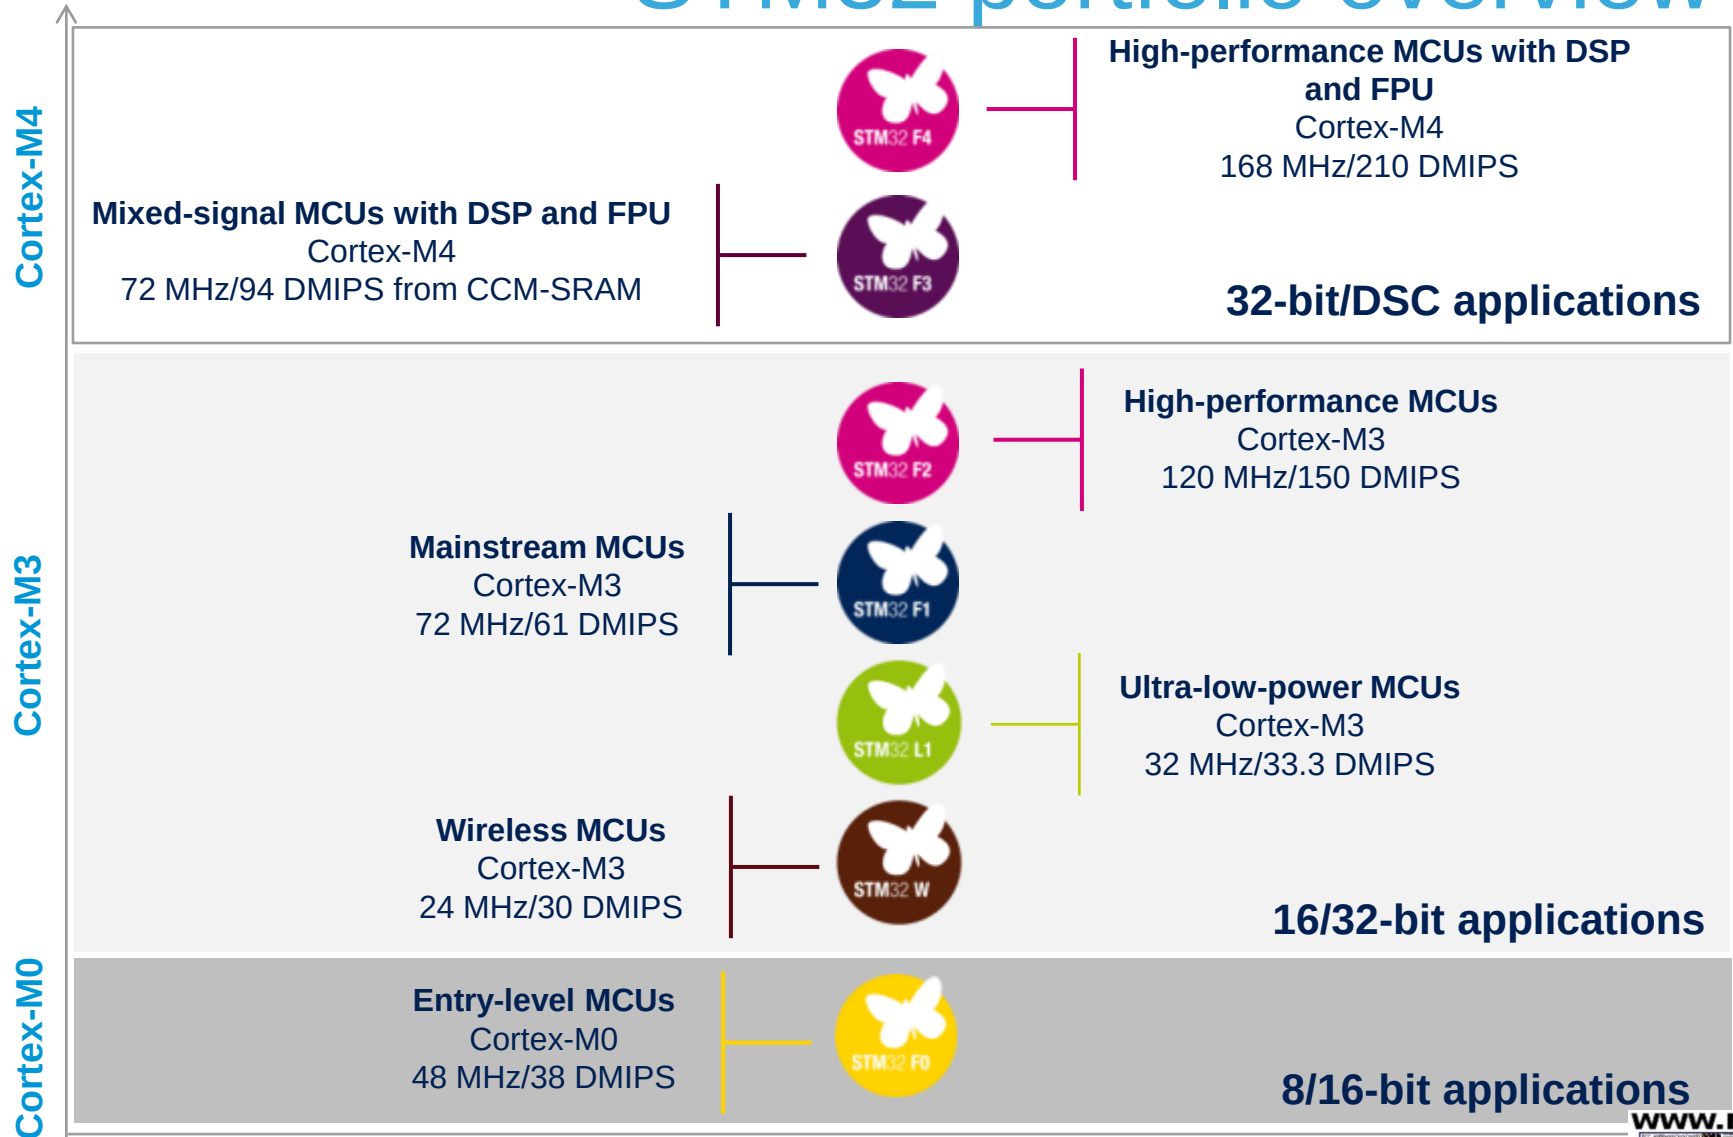


Real-Time Performance

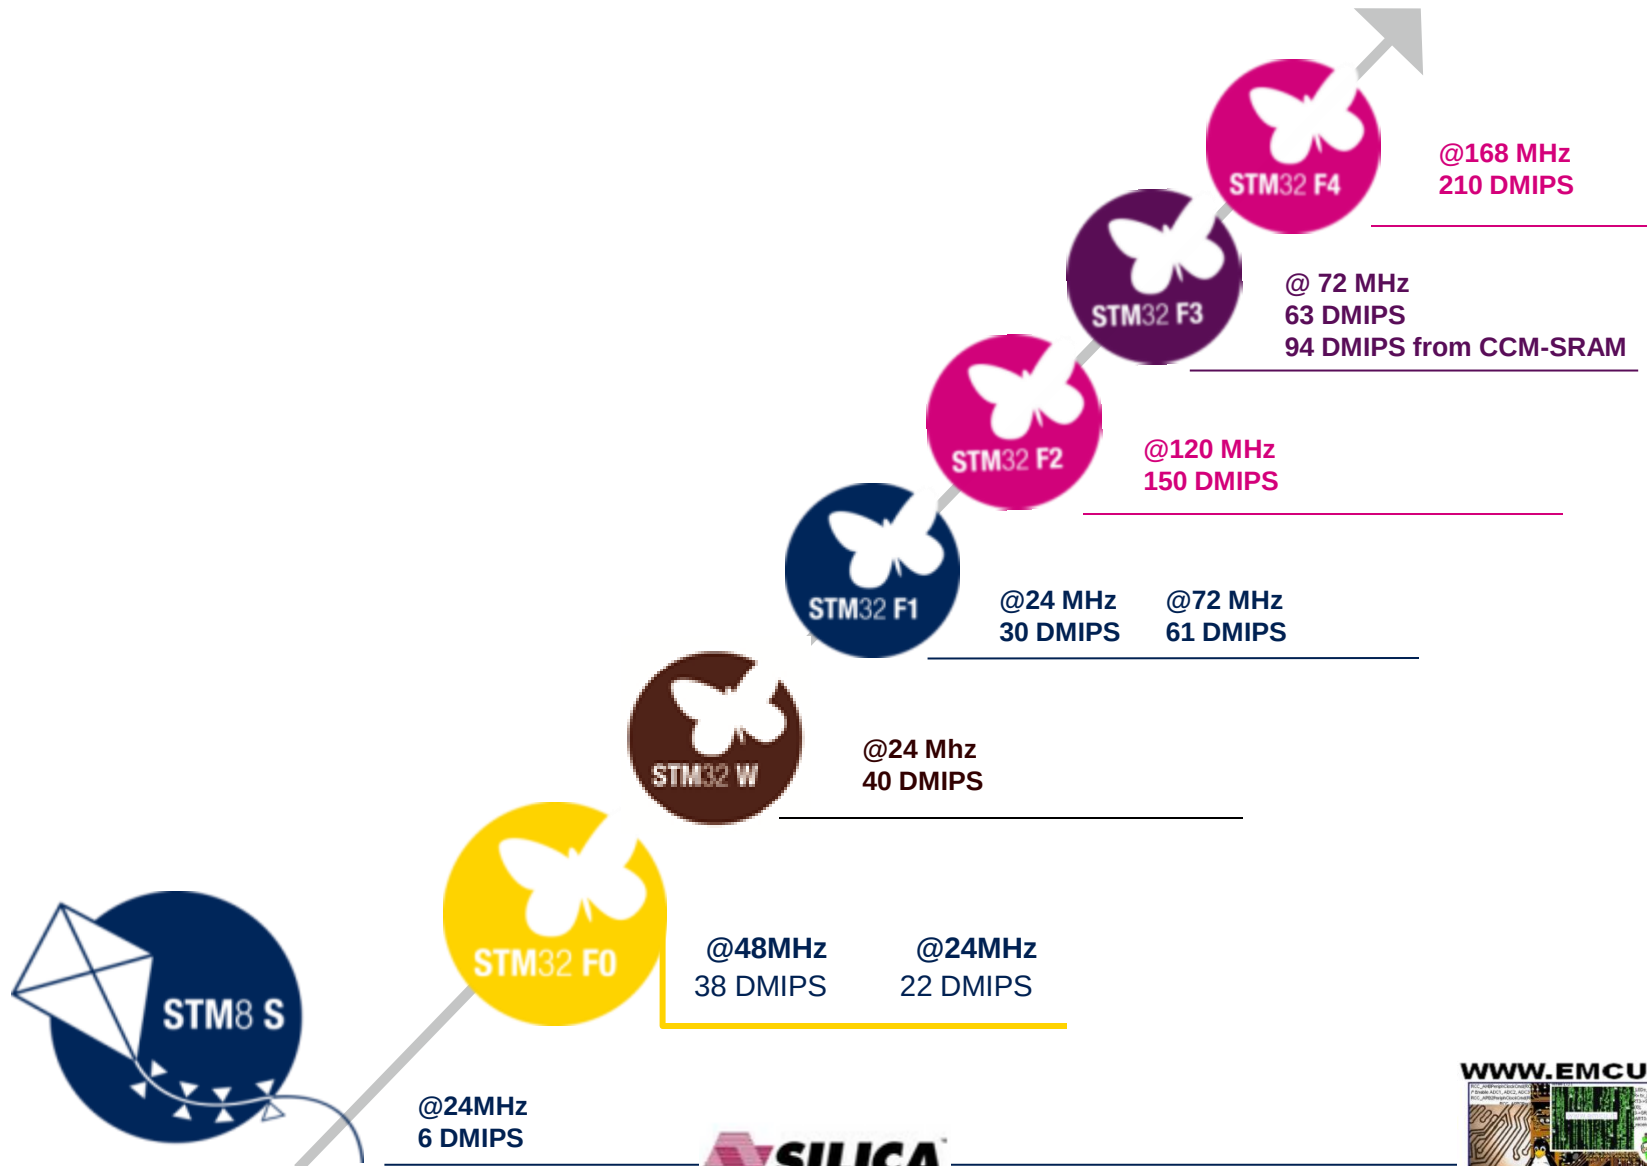


STM32F Complete offer

The arrows identify the Pin-to-Pin compatibility

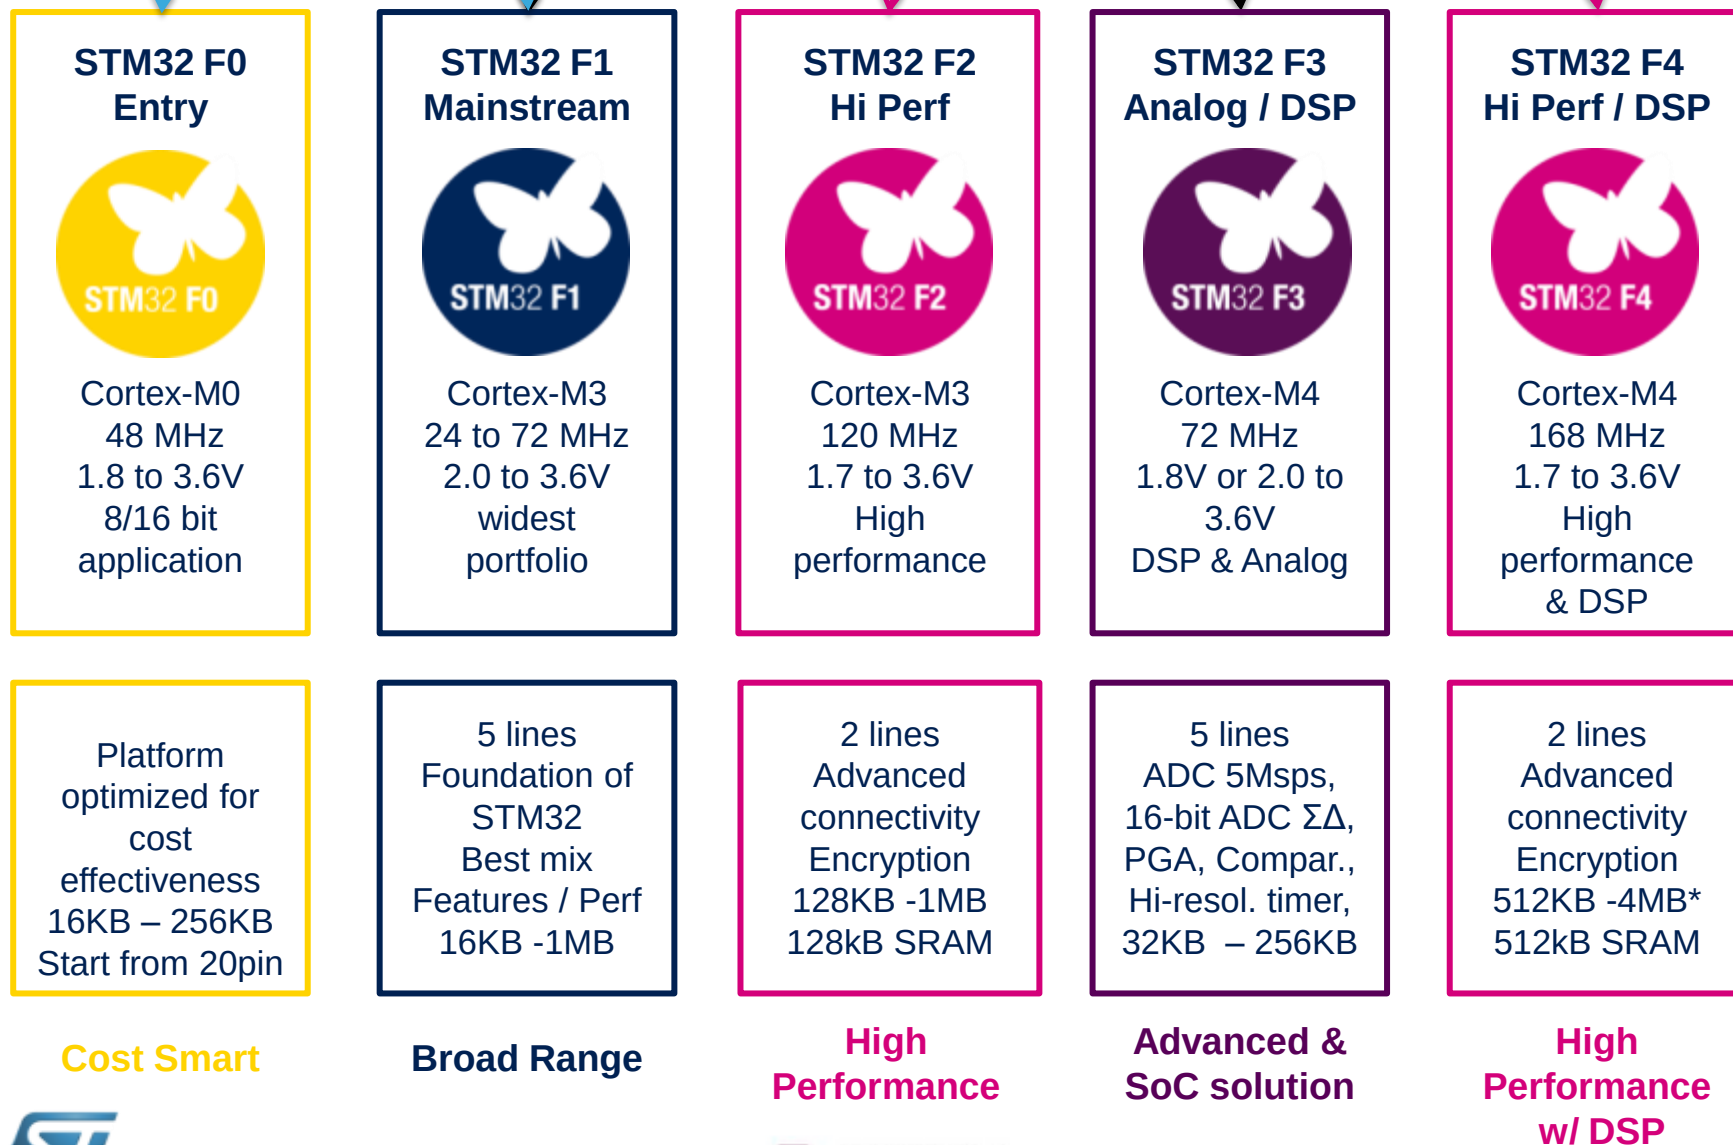

STM32 – leading portfolio in production

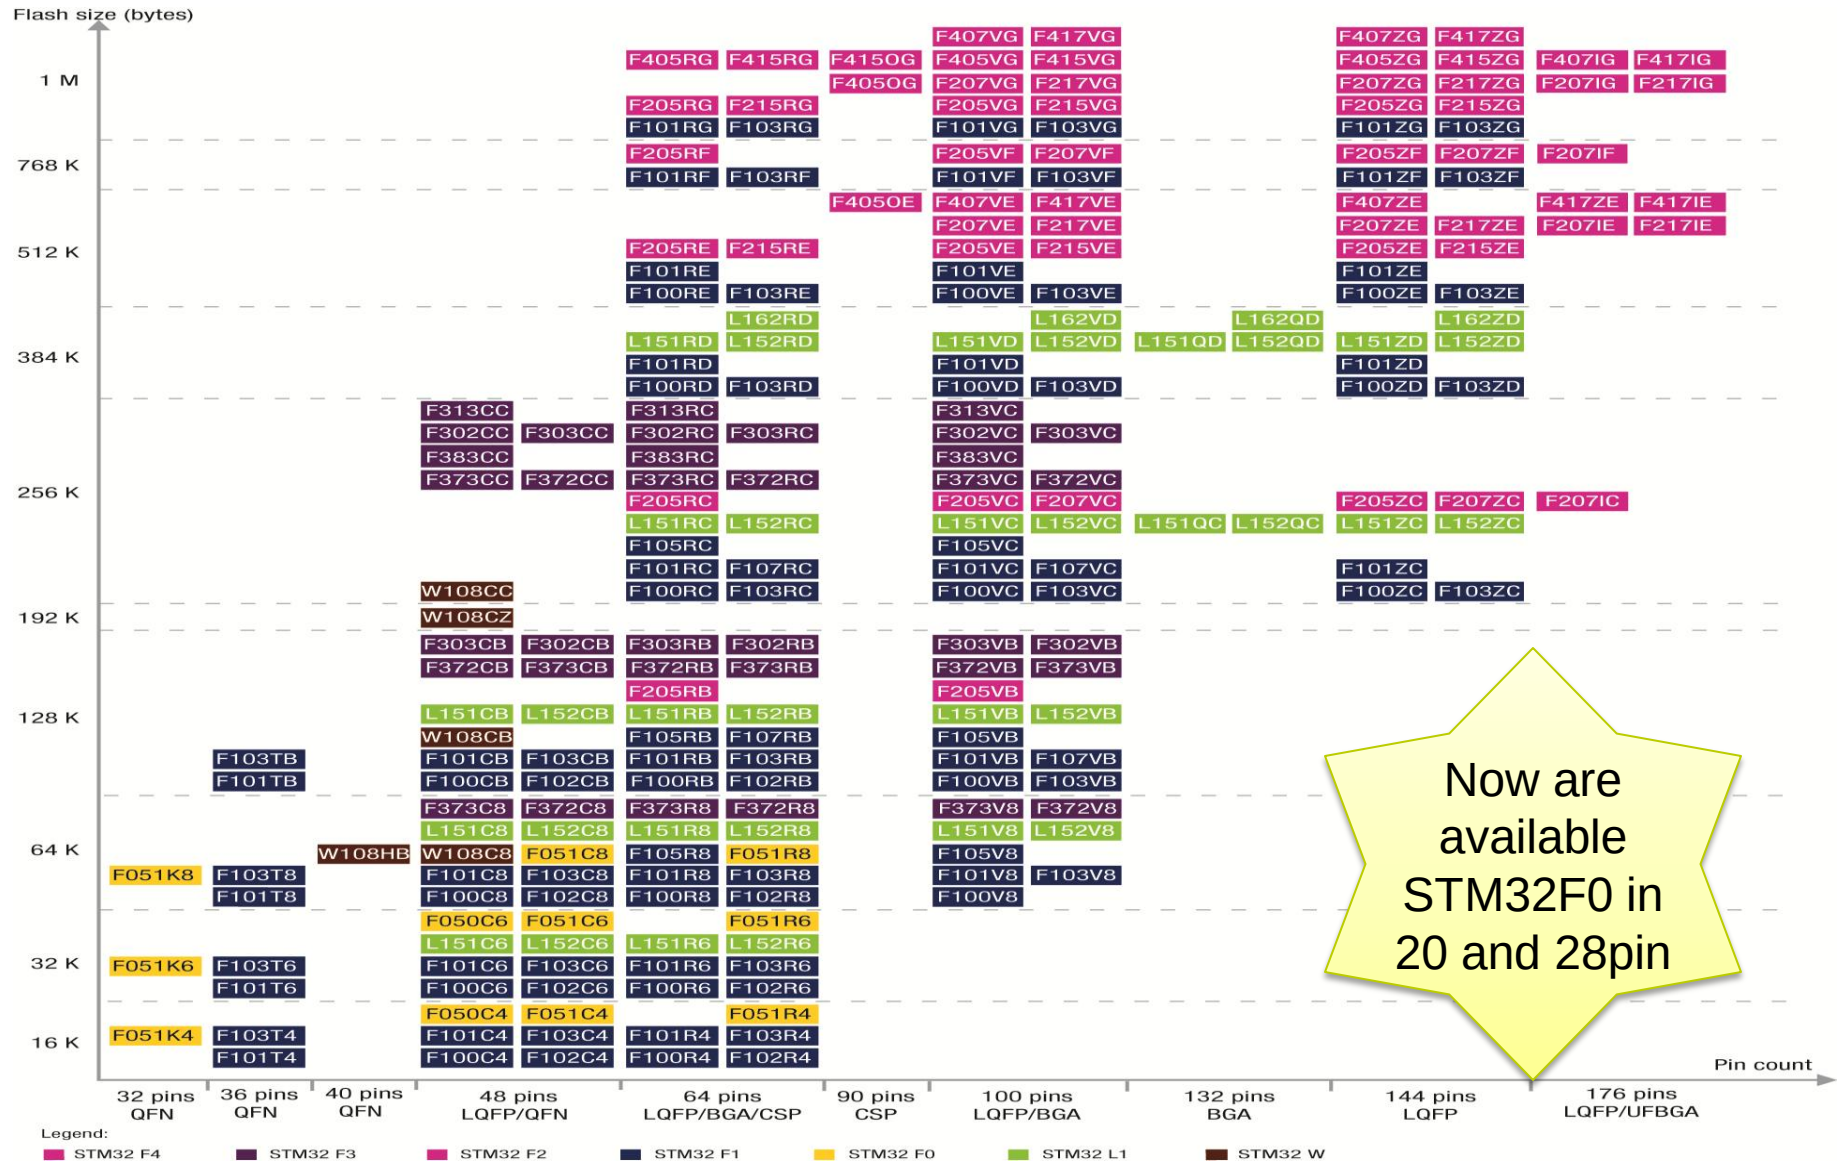

Powerful & scalable instruction set

Floating Point

DSP (SIMD, fast MAC)

Advanced data processing
Bit field manipulations

General data processing
I/O control tasks

